

Add single camera with KSecure app:-

STEP 1: → Connect your smart phone with your **local wifi** – or **router**

STEP 2: → Download **KSecure** application from the Play store

(<https://play.google.com/store/apps/details?id=com.findcam.ksecure>)



STEP 3: → **Power ON** the WIFI camera




STEP 4: → Long Press the **RESET** button –

(Camera passes the command--**Reset factory settings**

After sometimes again camera passes the command --**Wait for the configuration**)




STEP 5:→ open the KSecure app and click on the **+** button and press the **Yes** button –**You haven't added the device equipment to add or not? Confirm add?**

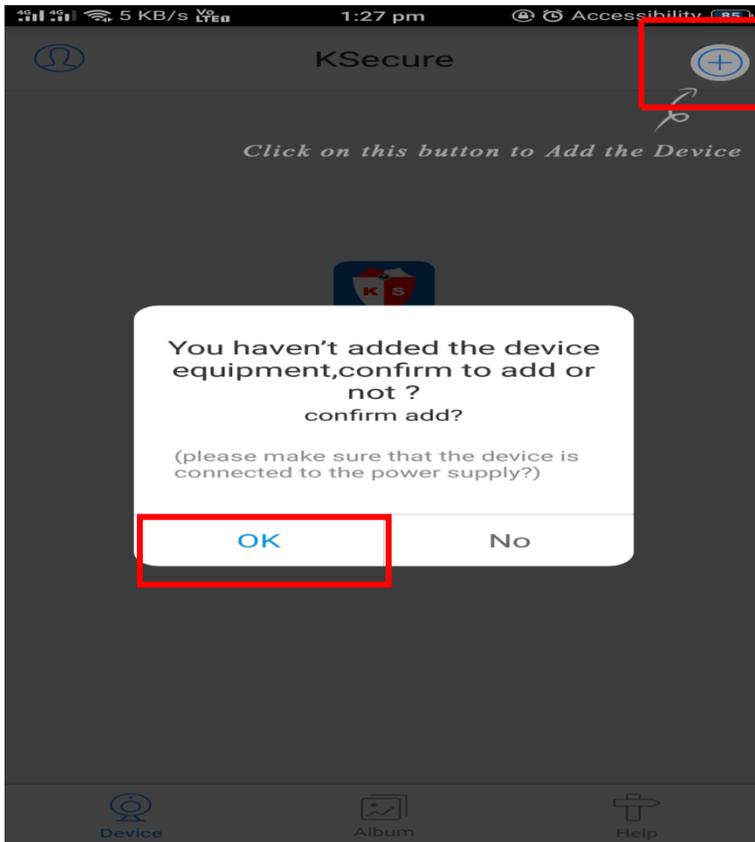

STEP 6: → Next step is - Add camera –Select your device status –> **State of the network**





STEP 7: → Add your device by—> **Scan QR code**

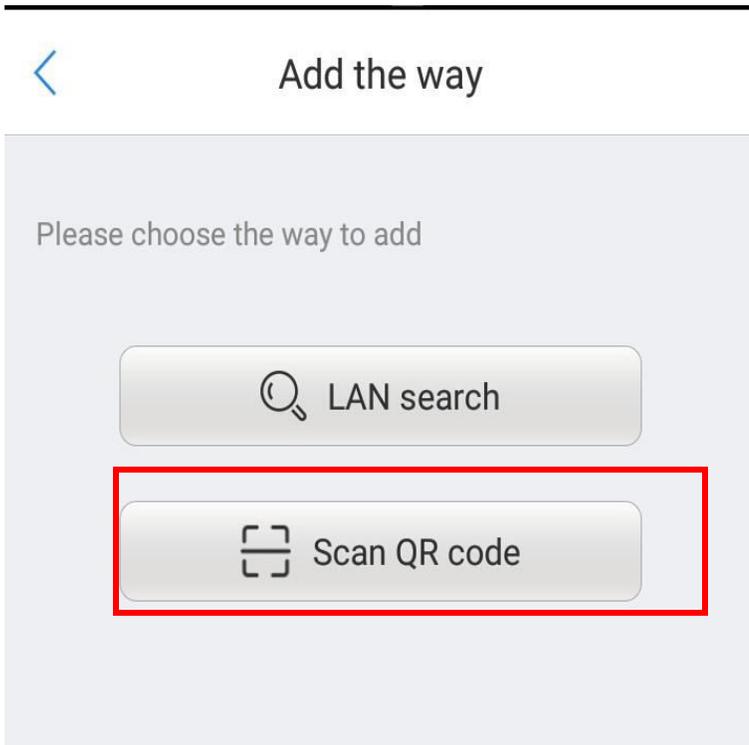



STEP 8:→ Scan the WIFI Camera QR code through KSecure app



STEP 9:→ After adding the WIFI camera -> press the Finish key.

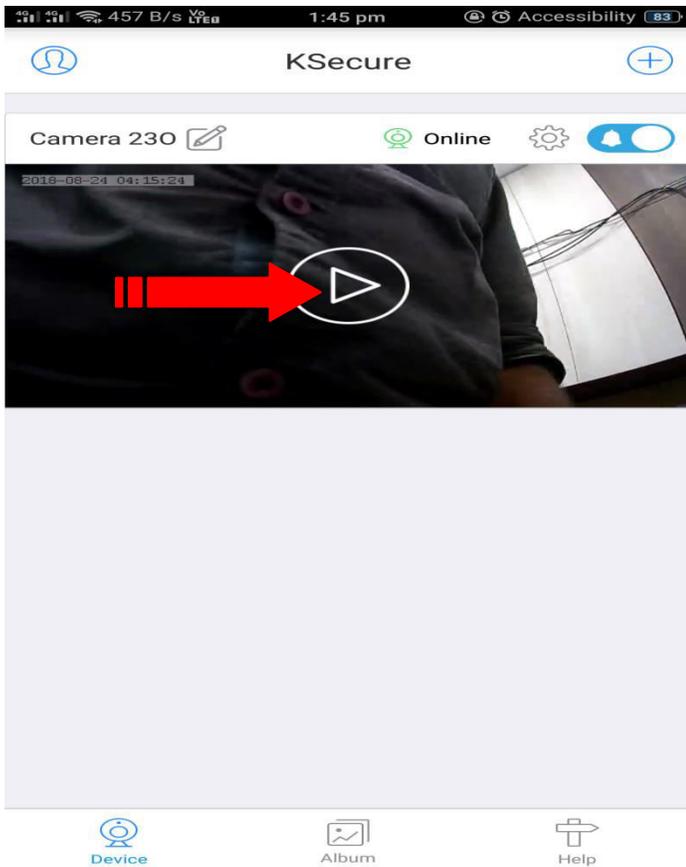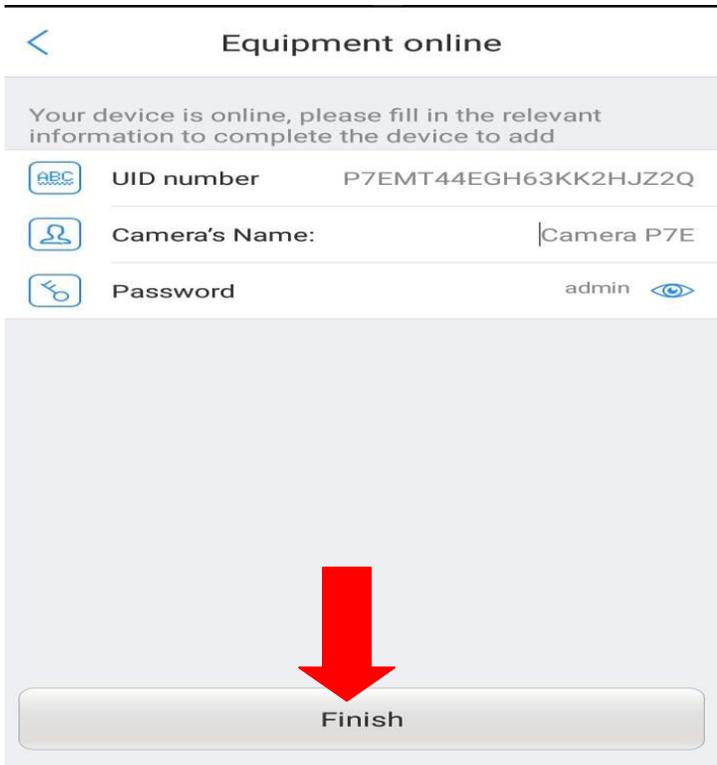



STEP 10:→ Click on the **PLAY** button to show the live video

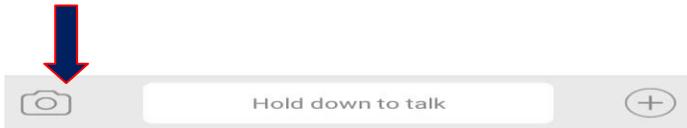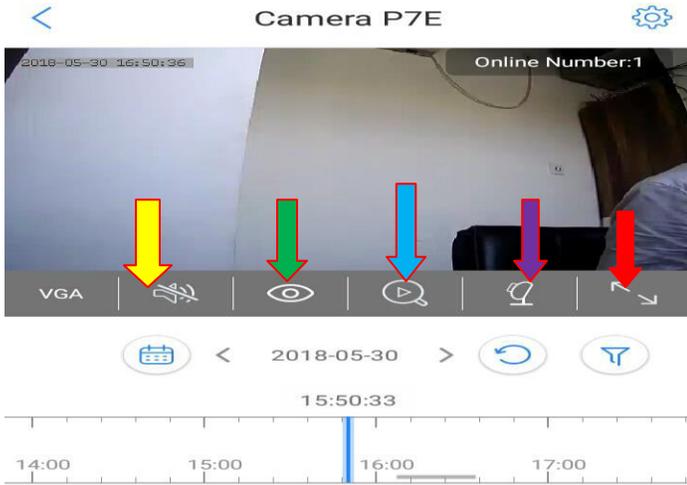


-  **VOLUME –MUTE OR NORMAL**
-  **PRIVATE MODE- ON – OFF**
-  **RECORDING MODE**
-  **CAMERA CONTROL PTZ MODE ON**
-  **FULL SCREEN MODE**
-  **Screen Shot the Screen which is live on Camera**




PLAY video mode – quality → **VGA – 1080P**

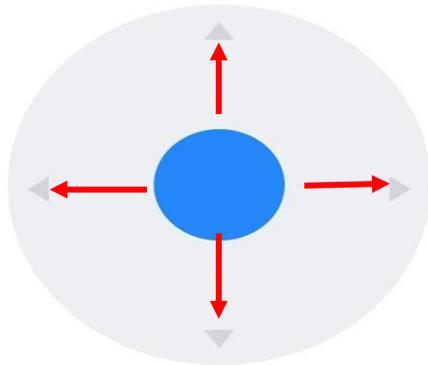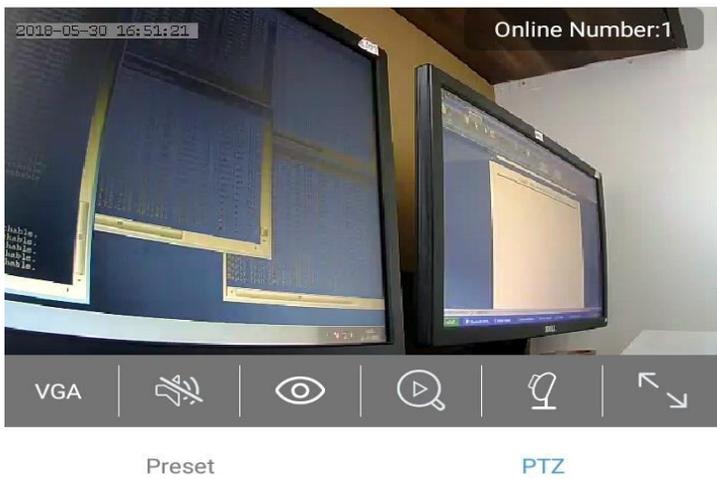

PTZ control – control camera → **left –right & up-down**

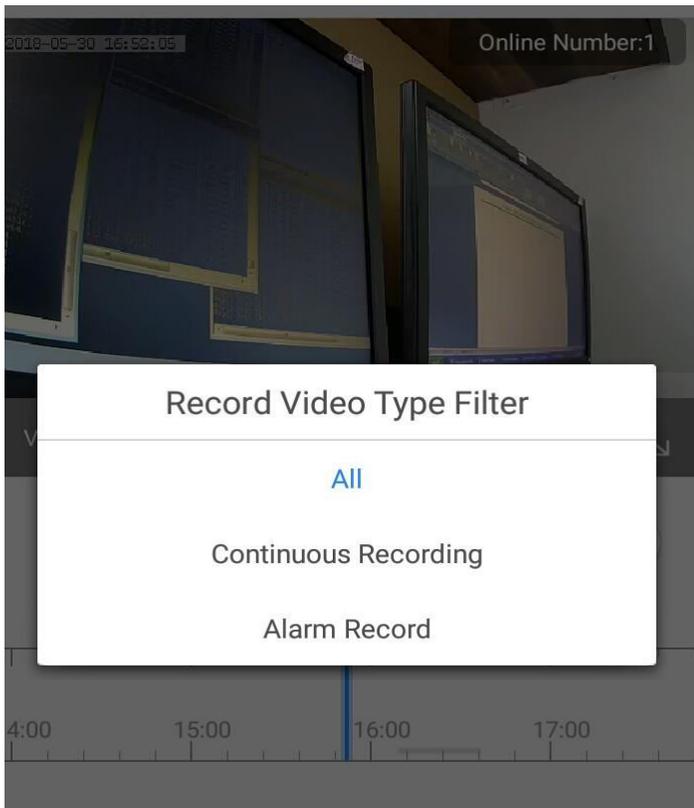


Record Video Type Filter:→ **All—Continuous Recording – Alarm Record choose anyone**

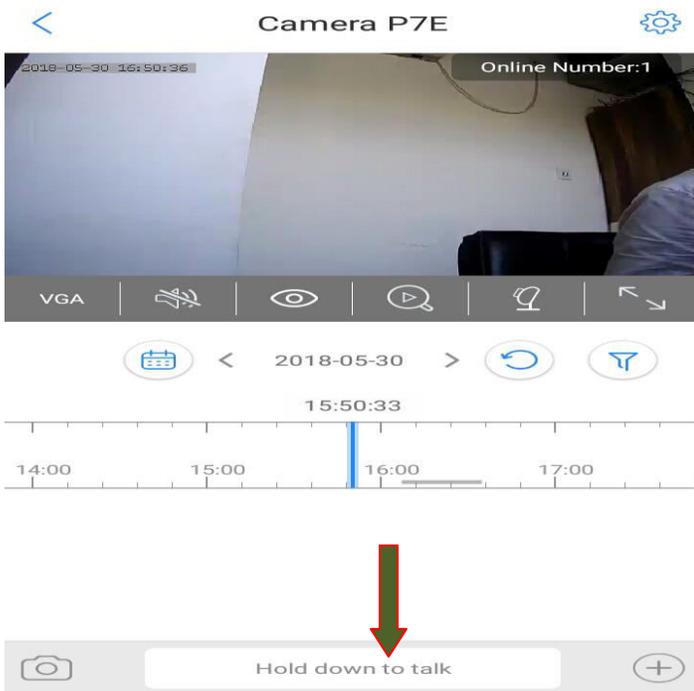

Press the **Hold down to talk button** and - passing any command to the specific WIFI camera
*****If you want multiple WIFI camera just follow the steps from STEP 3 to STEP 9**


Connect WIFI cameras with STB:-

STEP 1: → Press the **RED** button from the RCU to refresh the list of the all other WIFI devices present nearby.

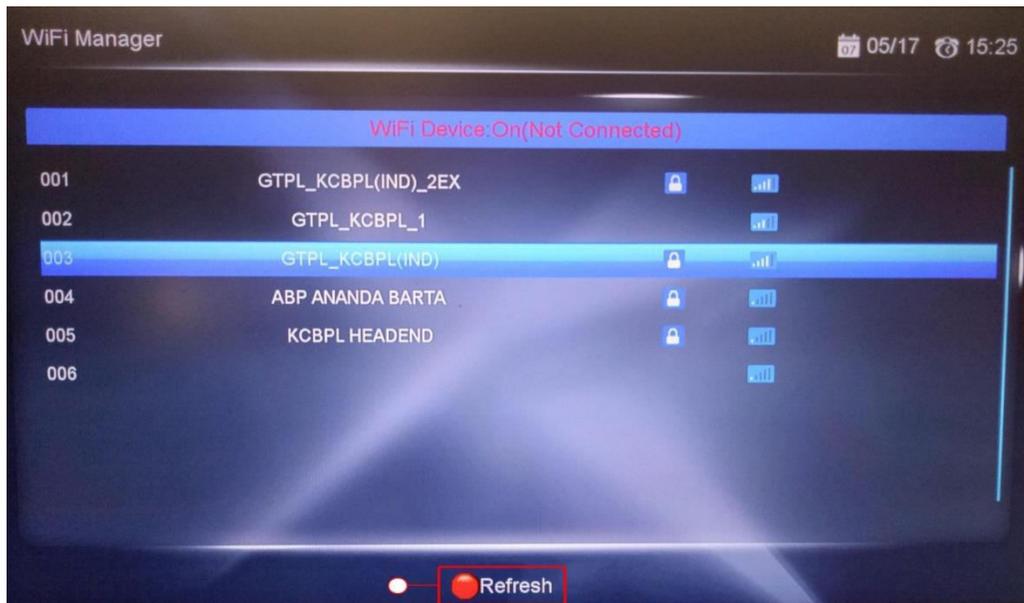

STEP 2 → on refreshing, list of all the nearby Wi-Fi devices will appear. A small lock symbol beside the Wi-Fi device shows that the device is password encrypted, otherwise not. Select the Wi-Fi device you want to connect your STB with and press OK from the RCU.


(Select –same Wi-Fi which is connected with KSecure app)

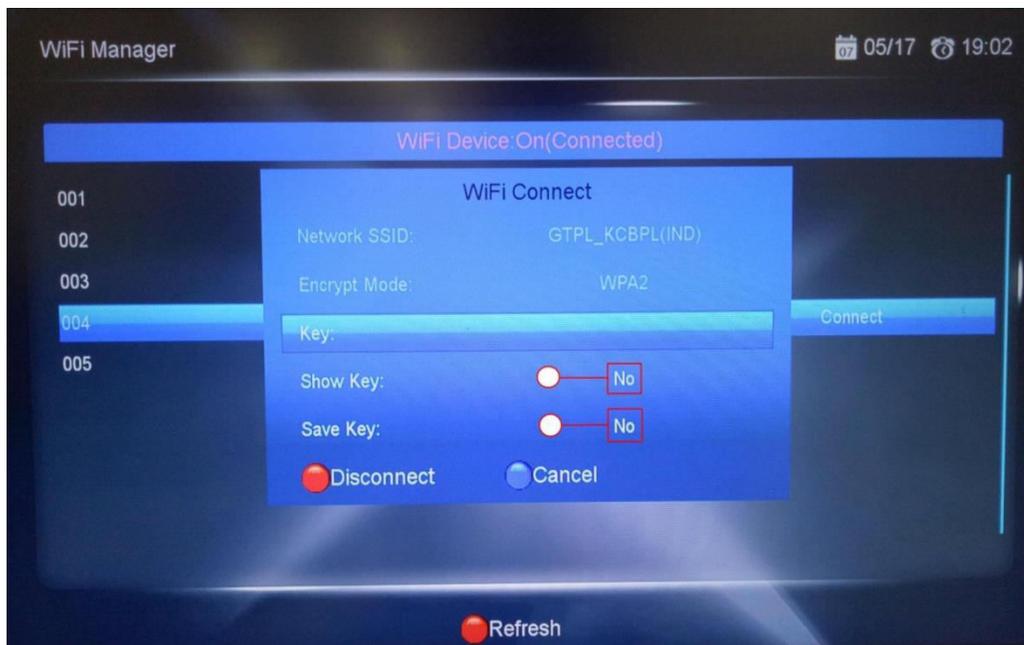


STEP 3 → After entering the WIFI device password go to the **OK** button present on the keyboard screen and press OK from the RCU as shown in the image below.




STEP 4 → after pressing **OK** button, the screen will return to the original WIFI settings screen.

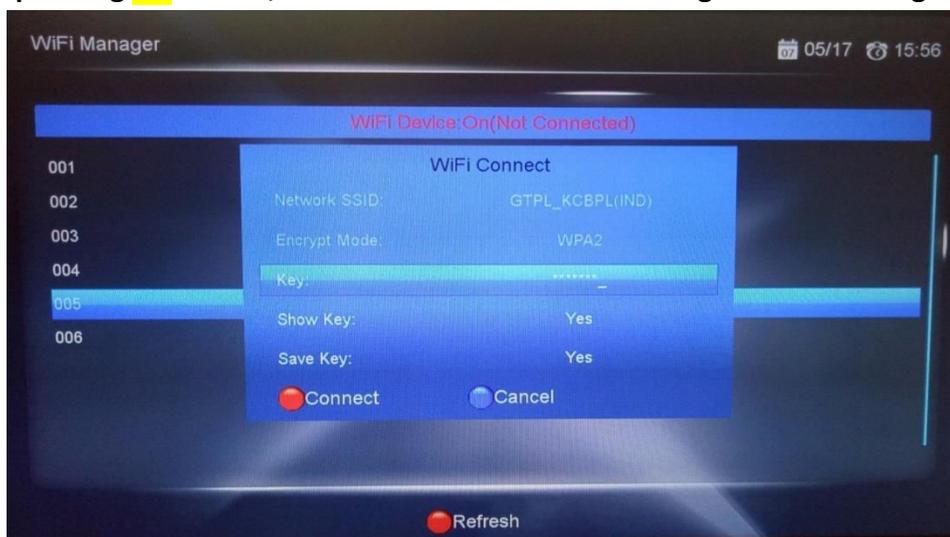

STEP 5 → Press the **RED** button from the RCU

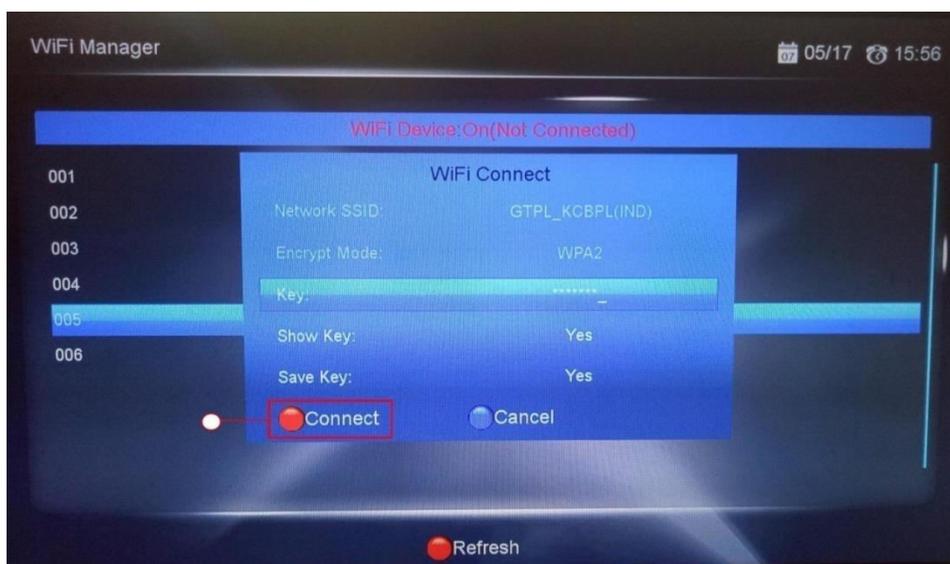


STEP 6 → Following message screen will appear as shown in the image below which shows that the WIFI device connection is in process.

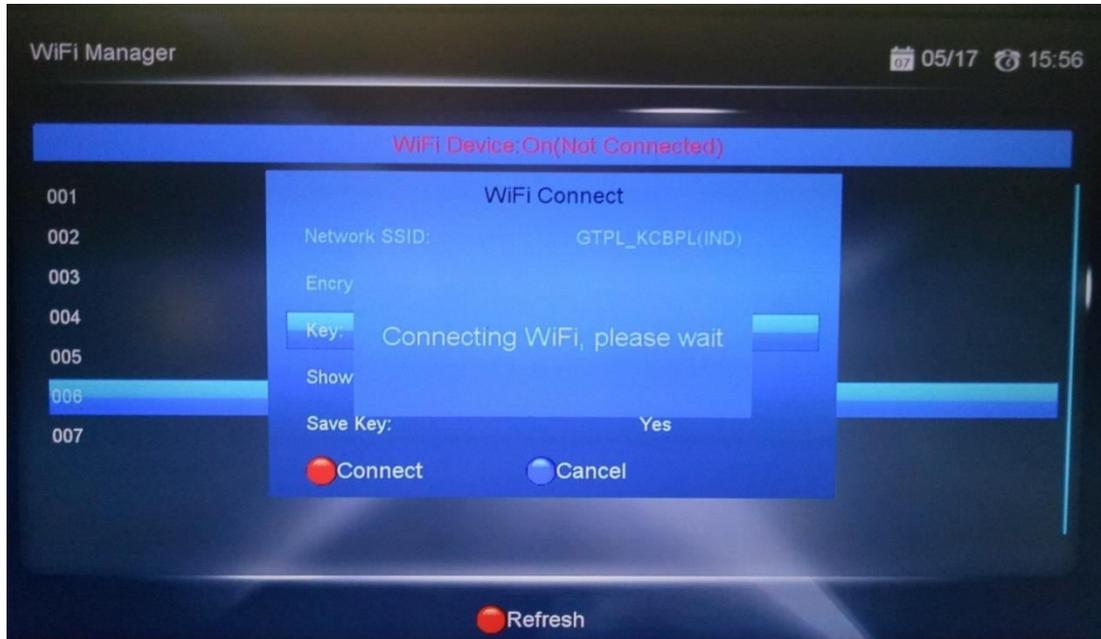


STEP 7:→ After successfully getting connected, your Wi-Fi device will now show connected as well as the text Wi-Fi Device: On will now show connected. Now you can exit from the Wi-Fi Manager screen by pressing the **EXIT** button from the RCU.




STEP 8→ Press MENU from the RCU then go to **Web** menu and there select App option and press OK.

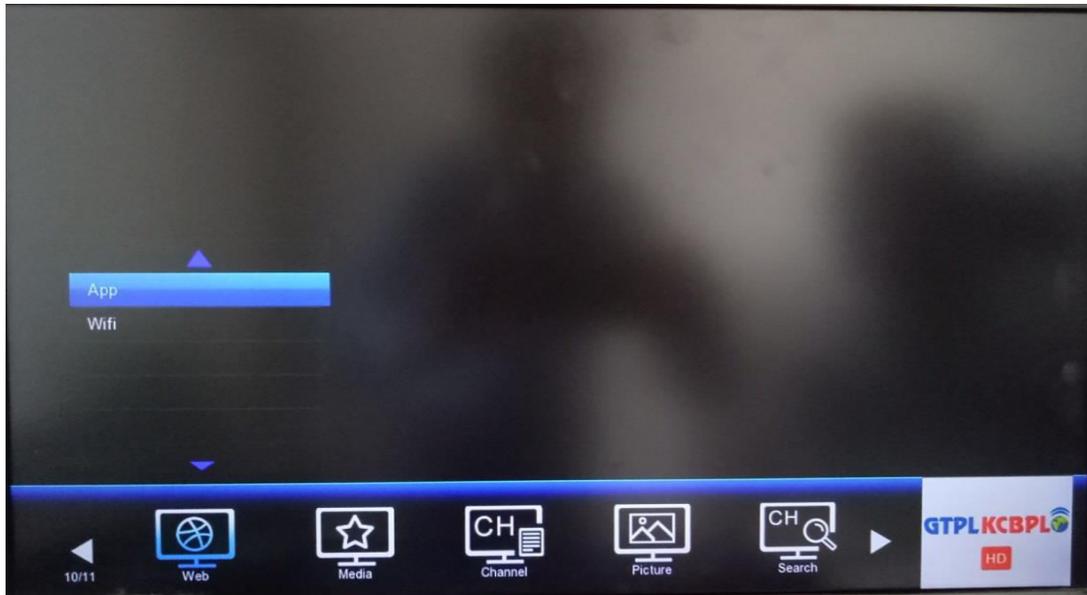


STEP 9→ Go to **KSecure** App and press **OK** from RCU.

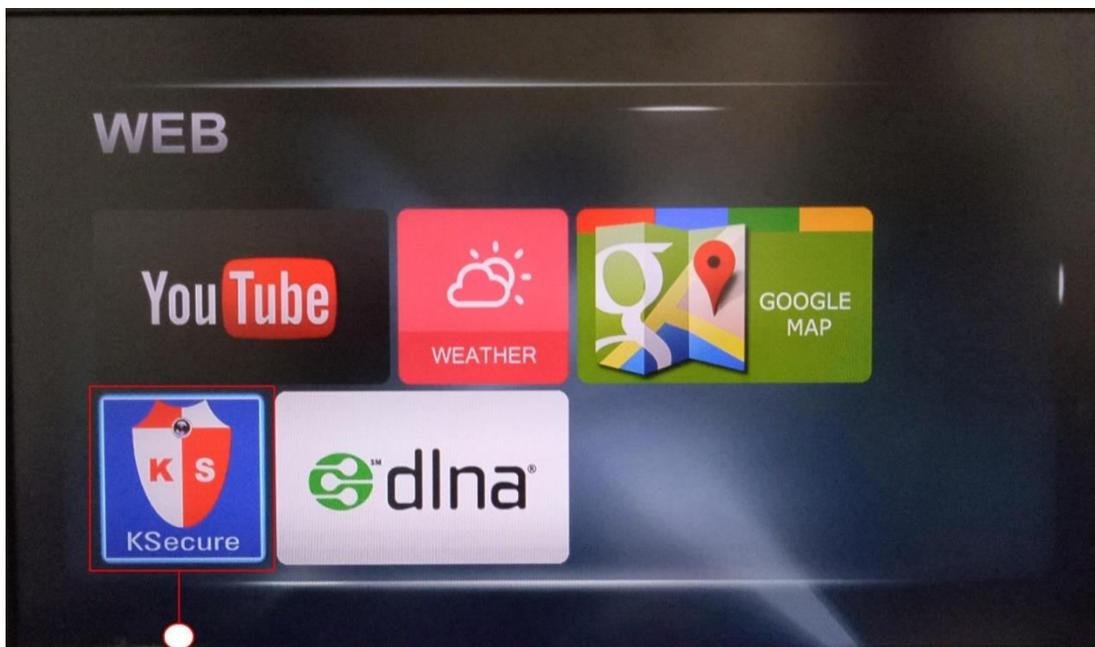

STEP 10→ First screen after opening KSecure App will appear like this. At the bottom of the screen there are various options present. Setting option enable you to configure the camera device. Add option enables you to add as number of camera device as you want. Delete enable you to delete the device that you want to. Record option enables record function. With remote navigation key You can rotate the camera in desired direction. With Select/Play option you can select the desired camera and play it. Press EXIT to get out of the camera App.

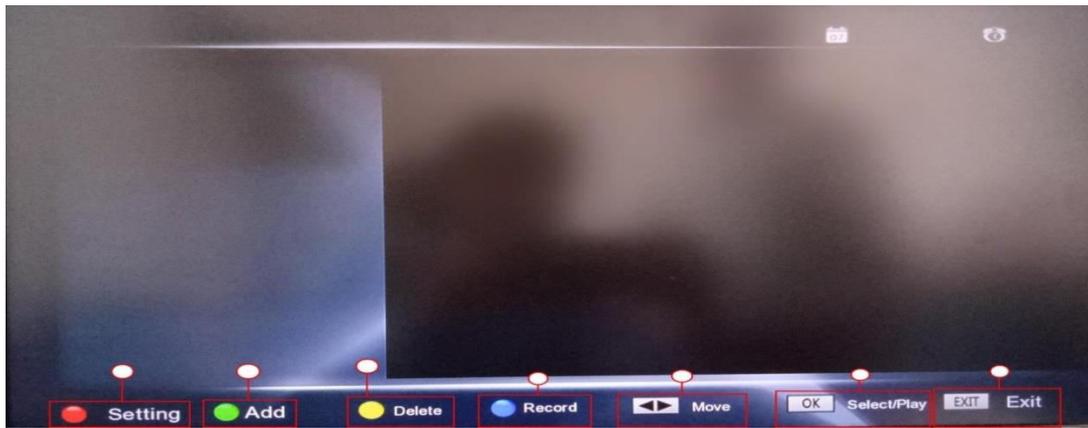

STEP 11→ If your camera device has been connected successfully then press GREEN button from the RCU to add the connected device and the camera will start automatically and the connected device name can be seen at the left side of the screen. In this way you can keep on adding new camera devices. All the connected camera devices can be seen with their device names at the left side of the screen. You can get access to a single camera at a time and scroll UP and DOWN on the device names to access a particular camera.

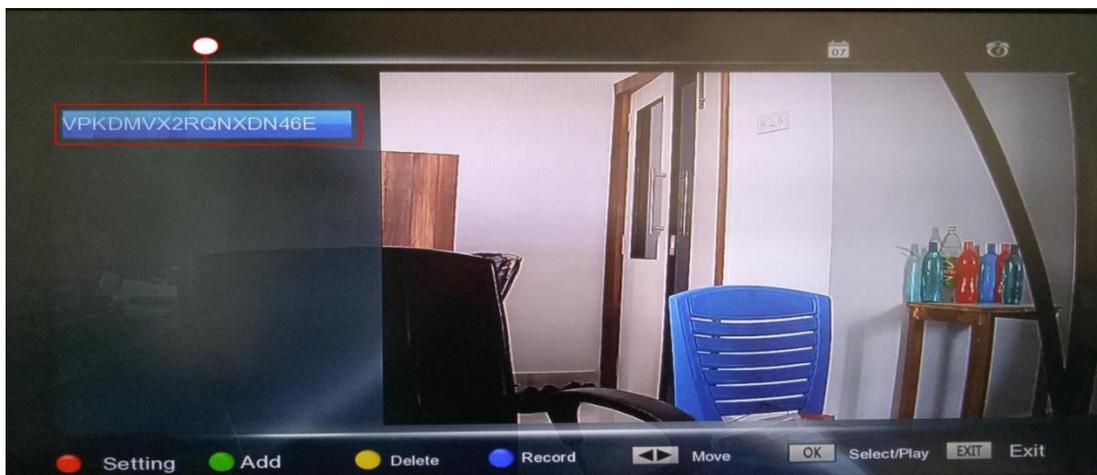


STEP 14→ Full screen view of the camera:



Access YOUTUBE, Google map, Weather Application, DLNA – multiple WIFI Cameras


Connect Smart phone with SAME WIFI ROUTER Which is connected with STB

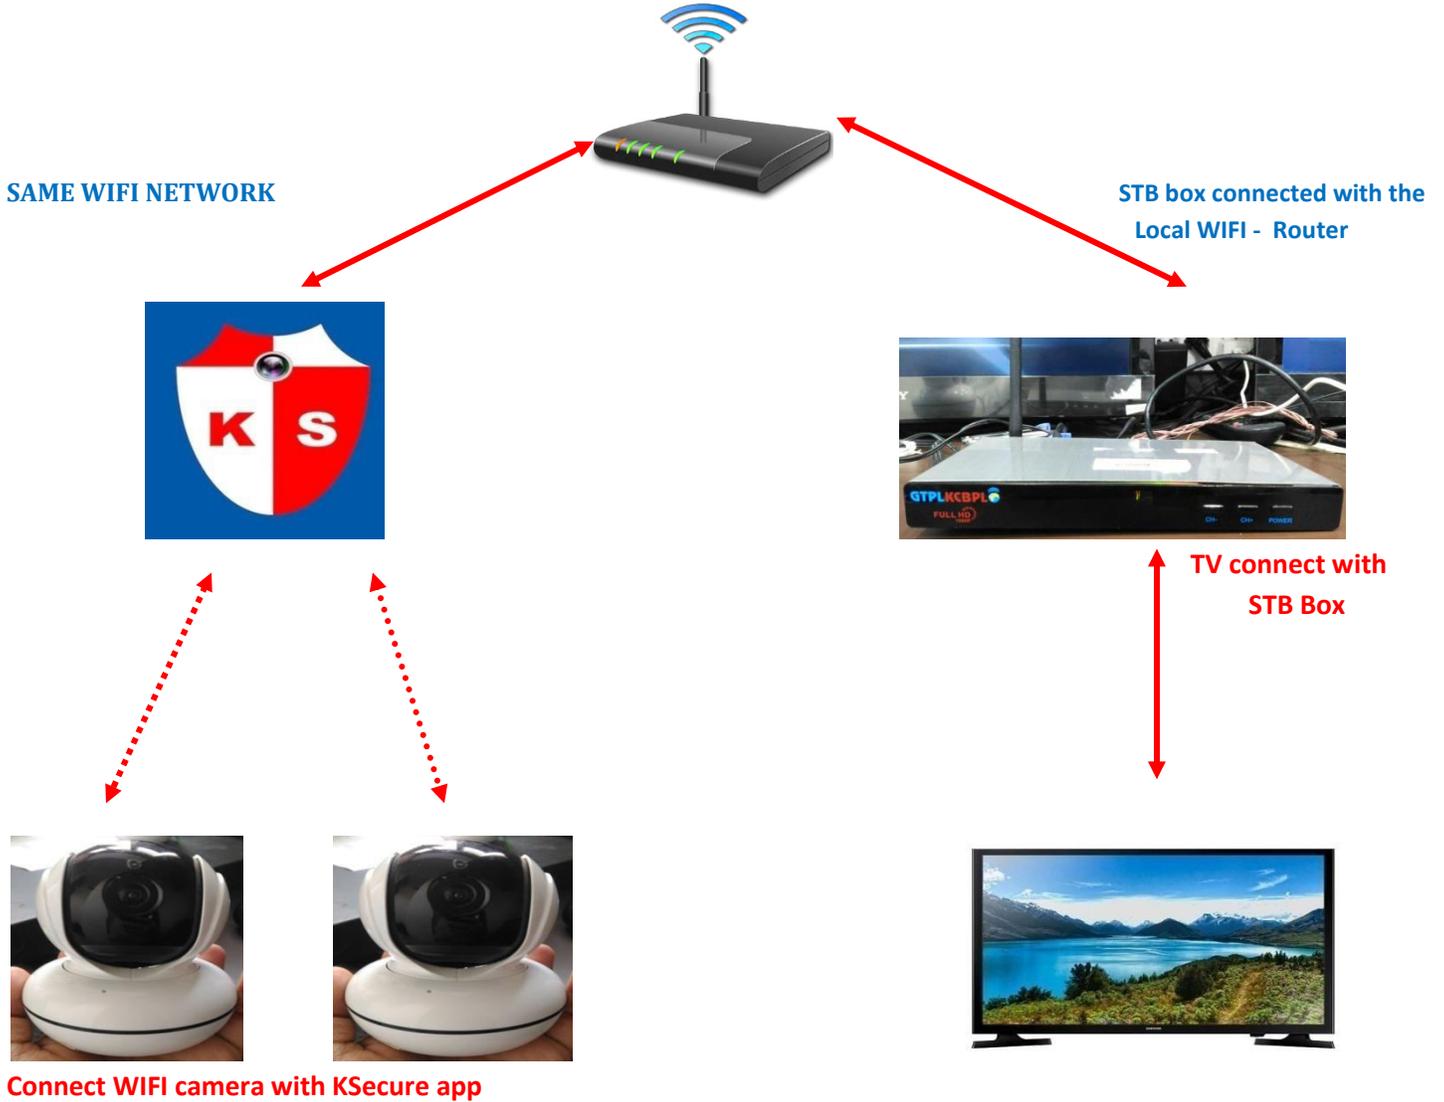

Connect Multiple WIFI-Cameras:-




1. Press the Reset button few sec. then change the camera mode – [AP MODE]
2. Then Search the Wi-Fi network from your smart phone- and select the wifi Camera from the list –

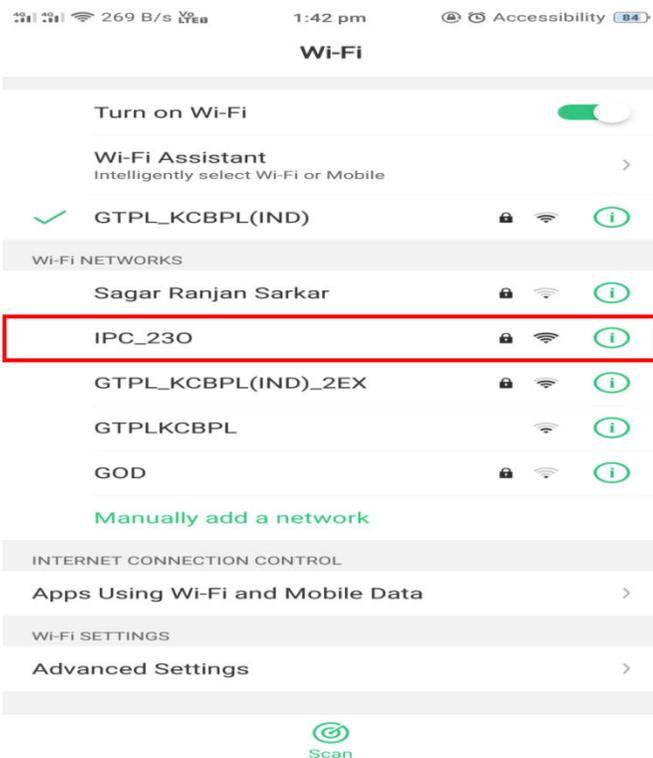


3. Select the Wi-Fi network – [IPC_230] and default password is- 66668888 then connect the camera wifi network with the smart phone.


4. Open the KSecure app and click on the **+** button and press the **Yes** button –**You haven't added the device equipment to add or not? Confirm add?** – **PRESS OK**

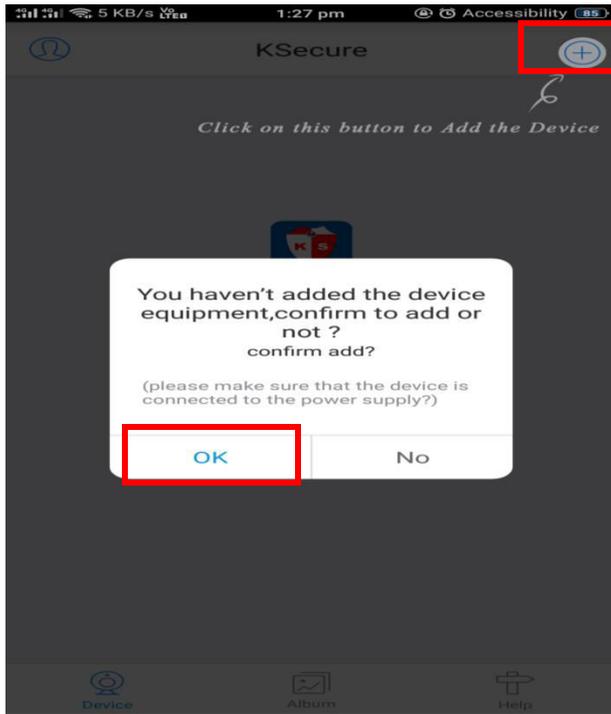


5. Next step is - Add camera –Select your device status –>**State of the network**

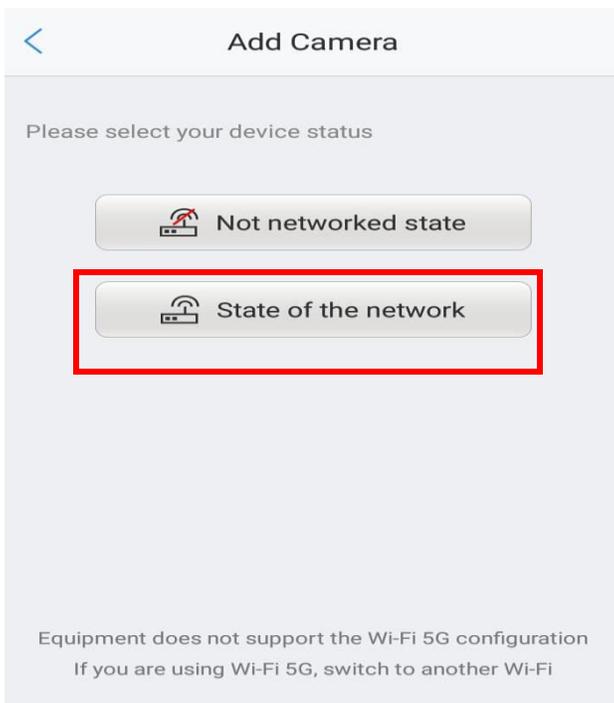


6. Add your device by—>Scan QR code

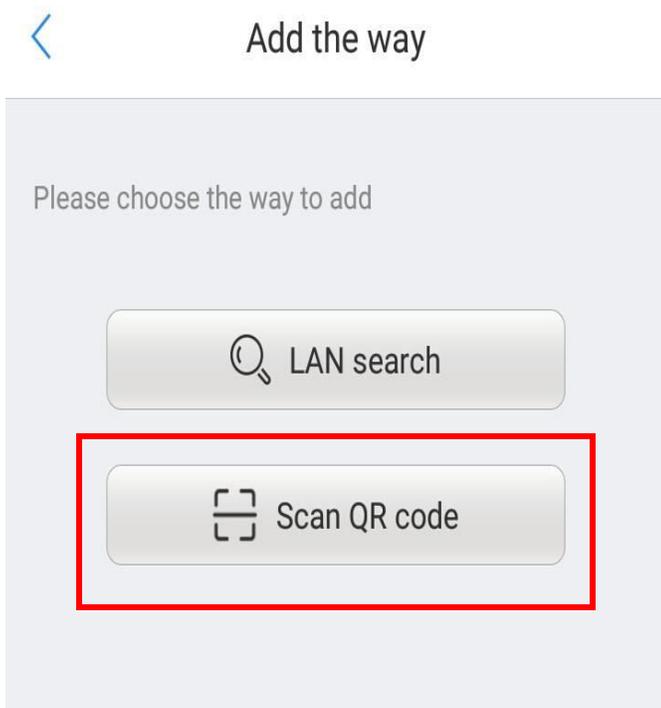

7. Press the **Finish** button and successfully add the camera


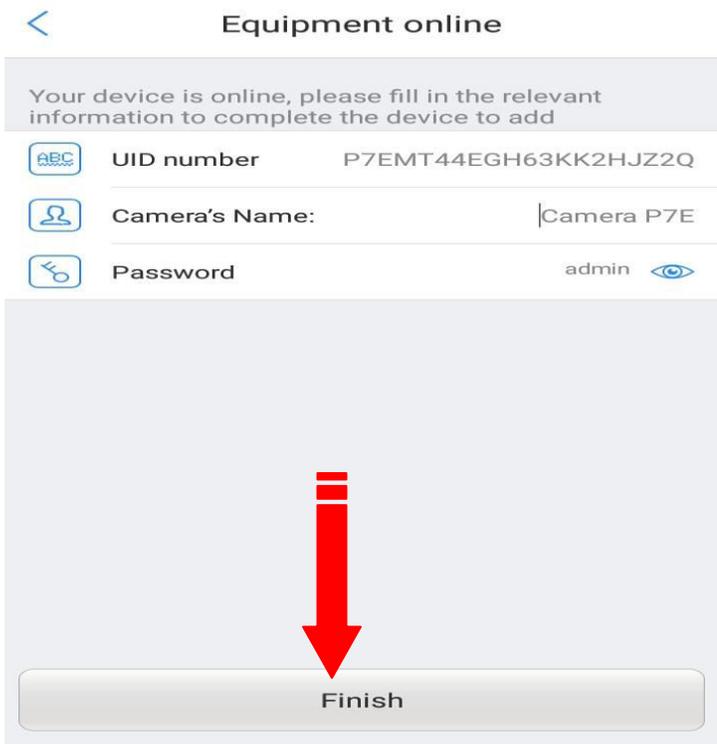


8. Then PRESS the **PLAY** button a new open window come on KSecure app

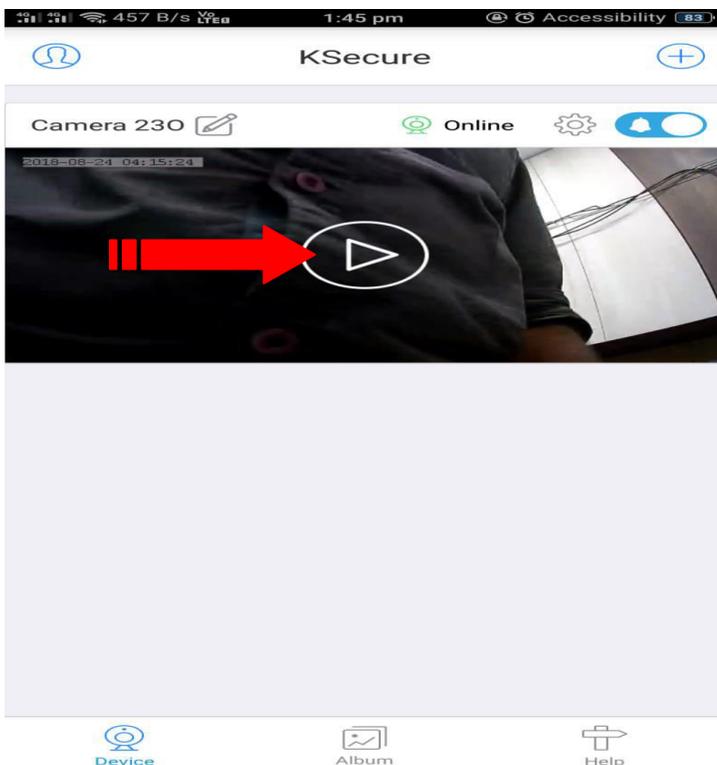

9. Then select the **Network** option- then select the WIFI network which you want to connect [Same wifi network which you want to connect the STB.


10. After that successfully connect the camera with wifi network.

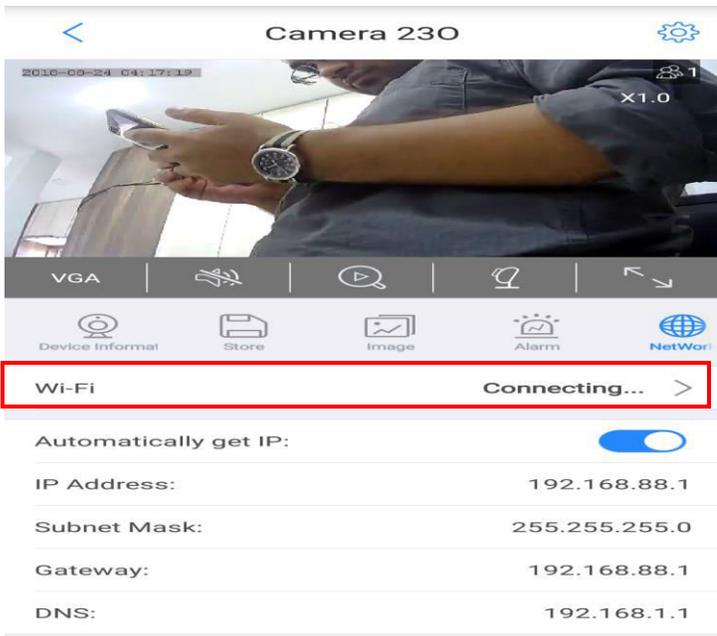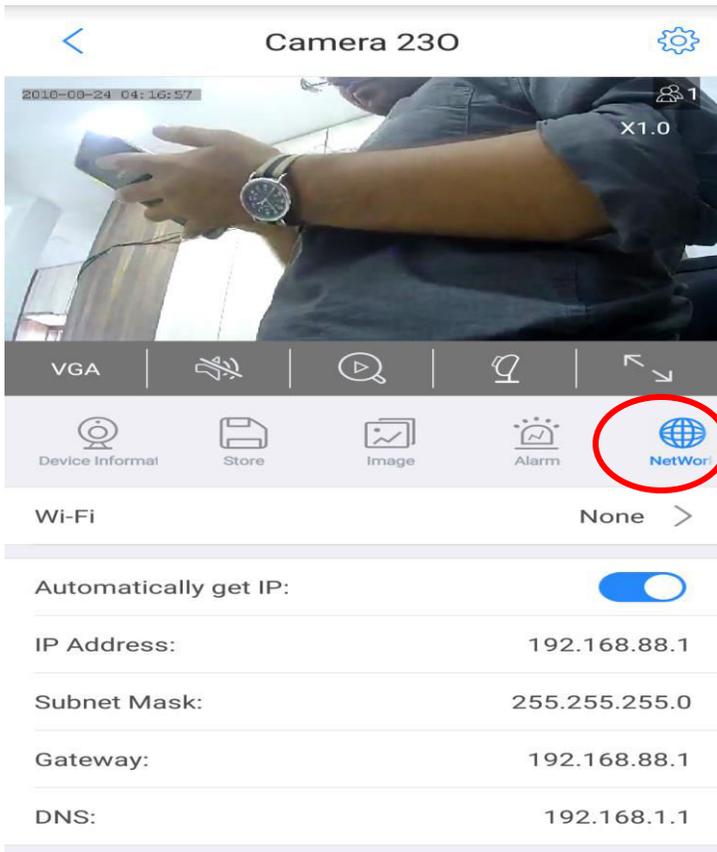

[Now if you again connect the camera with same network then .. follow the same process from camera AP mode selection and select the camera wifi from the smartphone .**

Add the camera with the KSecure app and after that change the wifi network mode from the camera settings – same wifi network of the STB box.]

Follow the steps from 1 to 10

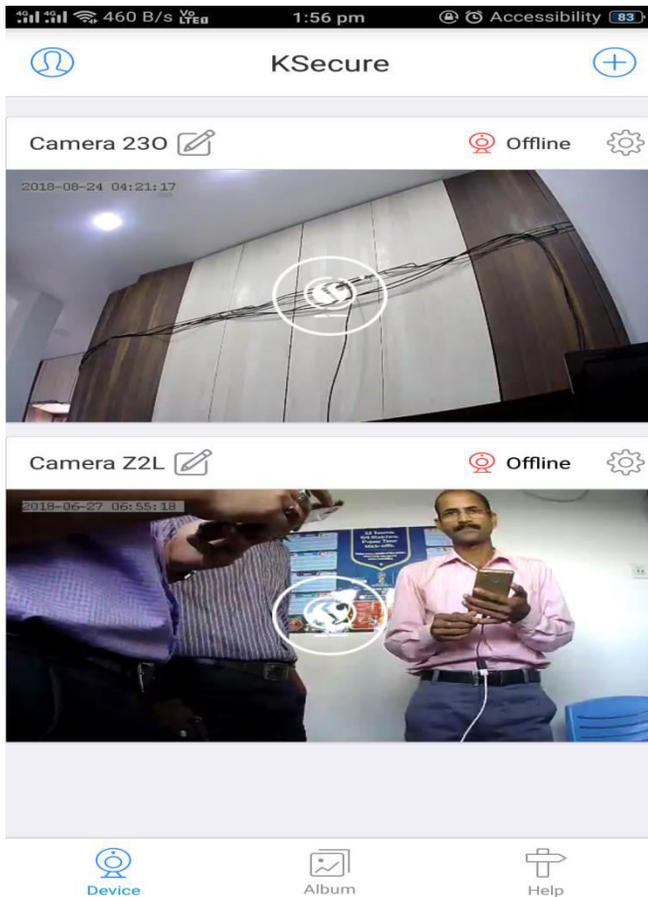


****Here connect the two camera in one KSecure app.**

Then connect the STB –box wifi with the same WIFI network


Connect many WIFI cameras with STB:-

STEP 1: → Press the **RED** button from the RCU to refresh the list of the all other WIFI devices present nearby.

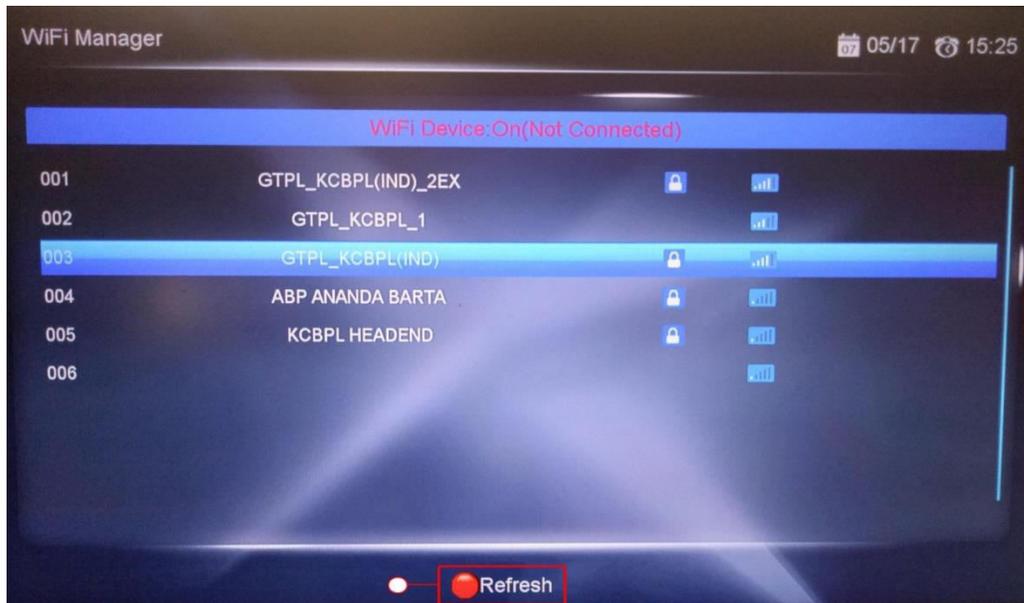

STEP 2 → on refreshing, list of all the nearby Wi-Fi devices will appear. A small lock symbol beside the Wi-Fi device shows that the device is password encrypted, otherwise not. Select the Wi-Fi device you want to connect your STB with and press OK from the RCU.


(Select –same Wi-Fi which is connected with KSecure app)

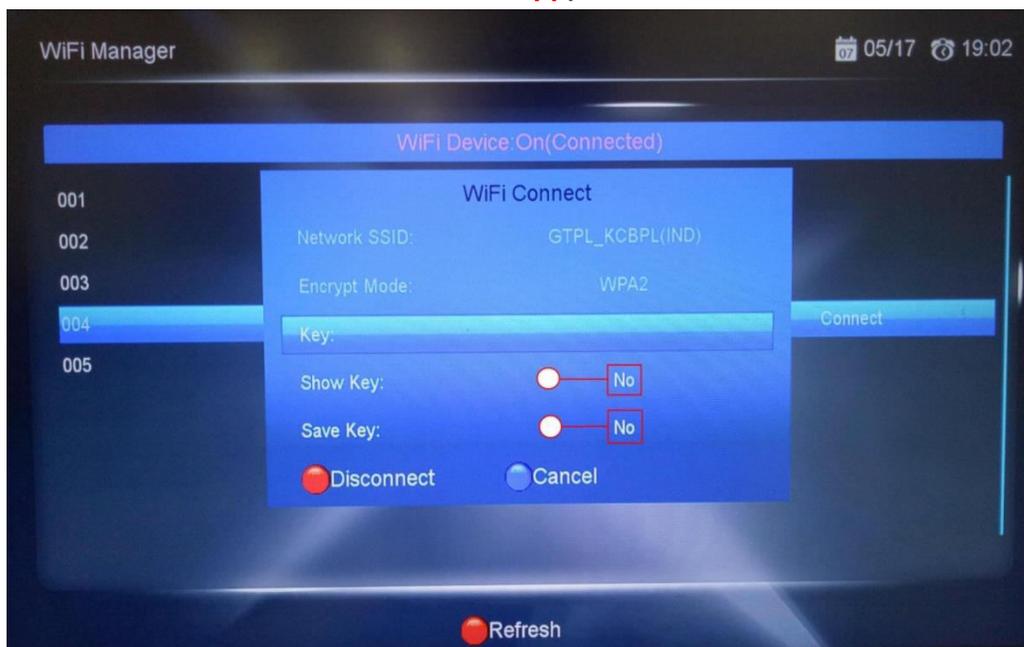


STEP 3 → After entering the WIFI device password go to the **OK** button present on the keyboard screen and press OK from the RCU as shown in the image below.



STEP 4 → after pressing **OK** button, the screen will return to the original WIFI settings screen.

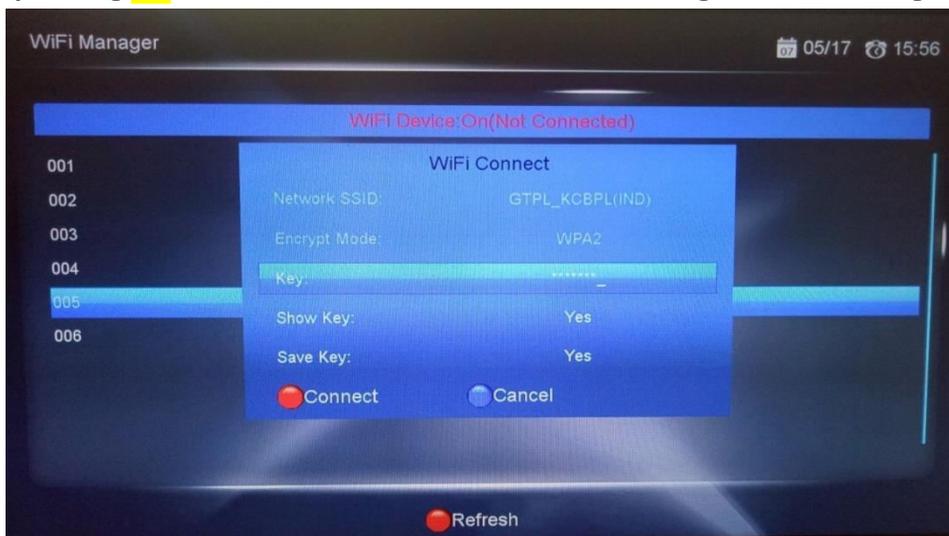


STEP 5 → Press the **RED** button from the RCU

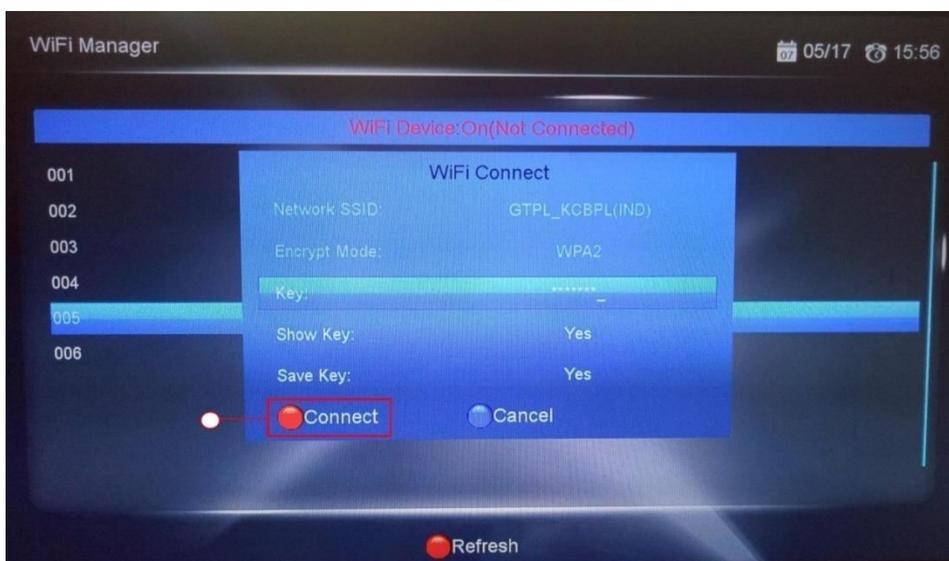

STEP 6 → Following message screen will appear as shown in the image below which shows that the WIFI device connection is in process.




STEP 7:→ After successfully getting connected, your Wi-Fi device will now show connected as well as the text Wi-Fi Device: On will now show connected. Now you can exit from the Wi-Fi Manager screen by pressing the **EXIT** button from the RCU.

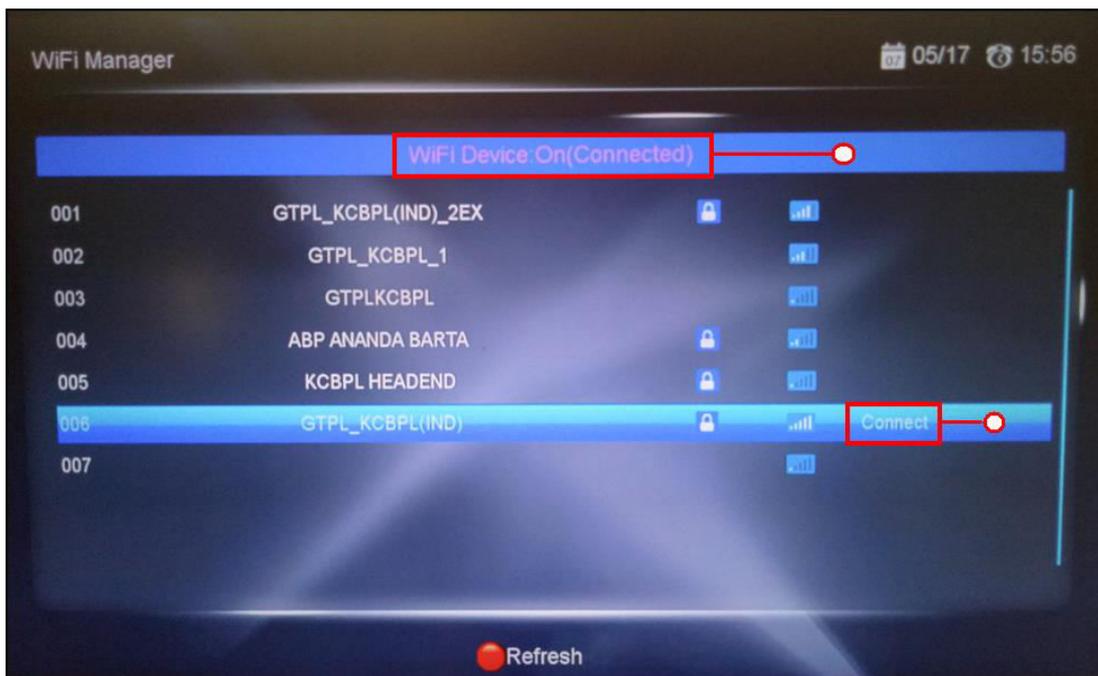


STEP 8→ Press MENU from the RCU then go to **Web** menu and there select App option and press OK.



STEP 9→ Go to **KSecure** App and press **OK** from RCU.

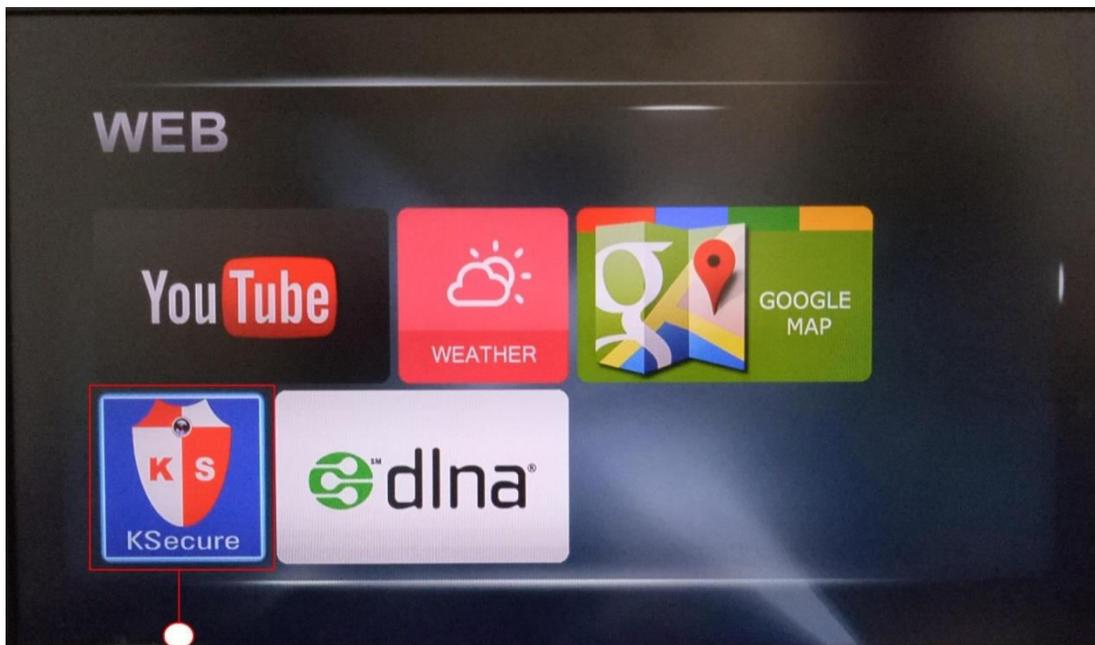

STEP 10→ First screen after opening KSecure App will appear like this. At the bottom of the screen there are various options present. Setting option enable you to configure the camera device. Add option enables you to add as number of camera device as you want. Delete enable you to delete the device that you want to. Record option enables record function. With remote navigation key You can rotate the camera in desired direction. With Select/Play option you can select the desired camera and play it. Press EXIT to get out of the camera App.

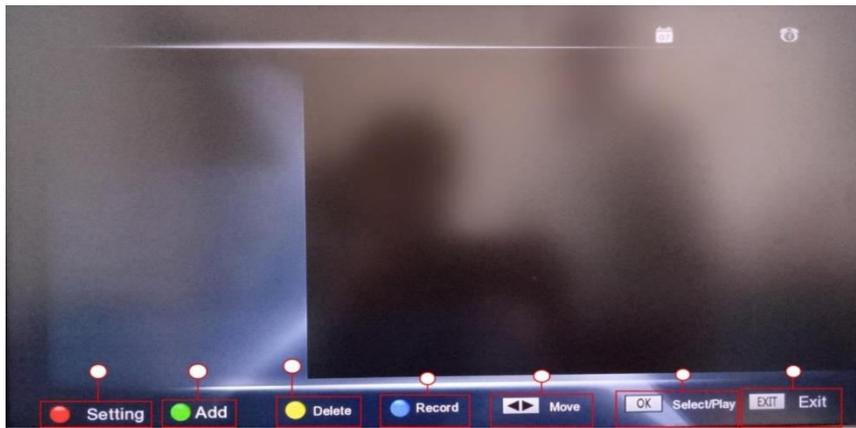

STEP 11→ if your camera device has been connected successfully then press **GREEN** button from the RCU to add the connected device and the camera will start automatically and the connected device name can be seen at the left side of the screen. In this way you can keep on adding new camera devices. All the connected camera devices can be seen with their device names at the left side of the screen. You can get access to a single camera at a time and scroll **UP** and **DOWN** on the device names to access a particular camera.

**** To add the multiple camera just press GREEN button from the remote**

